

PRORIL

60 Hz


Designed for continuous operations, excellent performance and easy maintenance, PRORIL Tank series pumps have proven their reliability and durability in demanding areas like construction, mining, tunneling, quarries, industries and rental applications.

Dewatering Pump

TANK 475


High Chrome Dewatering Pump



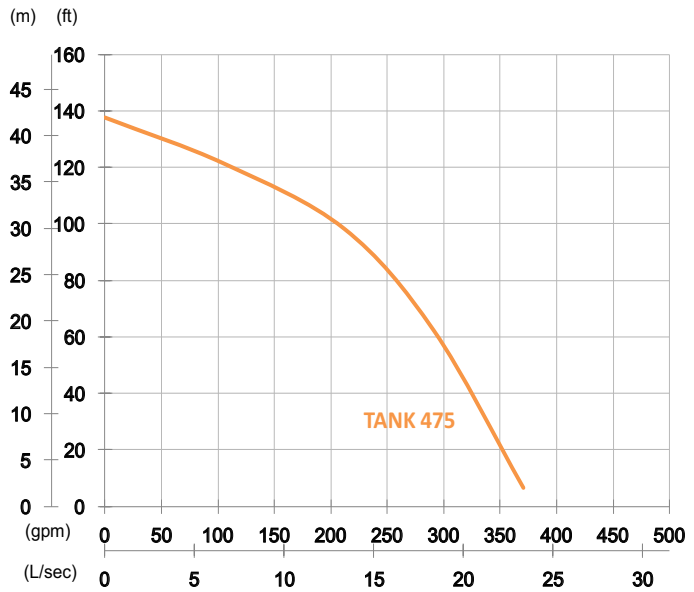


Shaft Speed : 3450 rpm

Outlet : 100mm, 4in

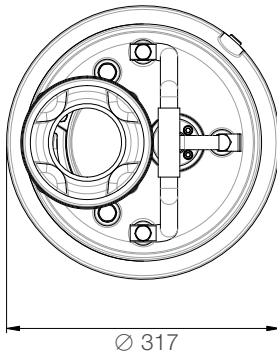

Ø 317

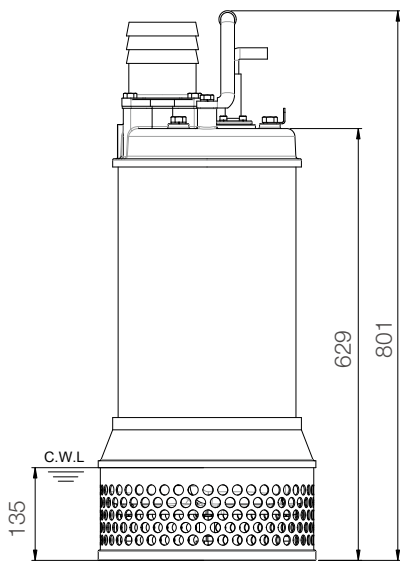

unit : mm

Weight : 93kg / 205 lbs

| OUTPUT | HEAD | FLOW |
|--------|-------------------|---------------------------|
| 7.5 kW | Rated : 30m, 98ft | Rated : 13.3 L/s, 211 gpm |
| 10 HP | Max : 42m, 138ft | Max : 23.3 L/s, 370 gpm |

| | | |
|-------------------------|-------------|---|
| Pump Type | | Electric Submersible Pumps |
| | | 3-Phase |
| Motor | Type | Induction Motor |
| | Poles | 2 Pole |
| | Insulation | Class F |
| | Protector | Circle Thermal Protector |
| | Starter | D.O.L. |
| Lubricant | | Food Grade (ISO VG32) |
| Impeller Type | | Opened |
| Shaft Seal | | Double Mechanical Seal Silicon Carbide VS Ceramic / Carbon |
| Bearings | | C3 Shielded ball bearings |
| Cable | | PVC (CSA Certified) / H07RN-F 10m (33ft) or longer upon request. |
| Materials | Pump Casing | Gray Iron |
| | Impeller | Chromium Iron |
| | Motor Frame | Stainless Steel |
| | Motor Shaft | Stainless Steel |
| | Strainer | Stainless Steel |
| Max. Liquid Temperature | | 40°C (104°F) |
| Max. Submersion Depth | | 20m (66ft) |
| pH Range | | pH 5 - pH 8 |