

PRORIL

60 Hz


GOVOX Series, these vortex pumps feature a less impeller wear and longer pump life by a vortex flow that allows fibrous materials and solid matters to be pumped out without obstruction.

Dewatering Pump

TANK 8370

High Chrome Dewatering Pump





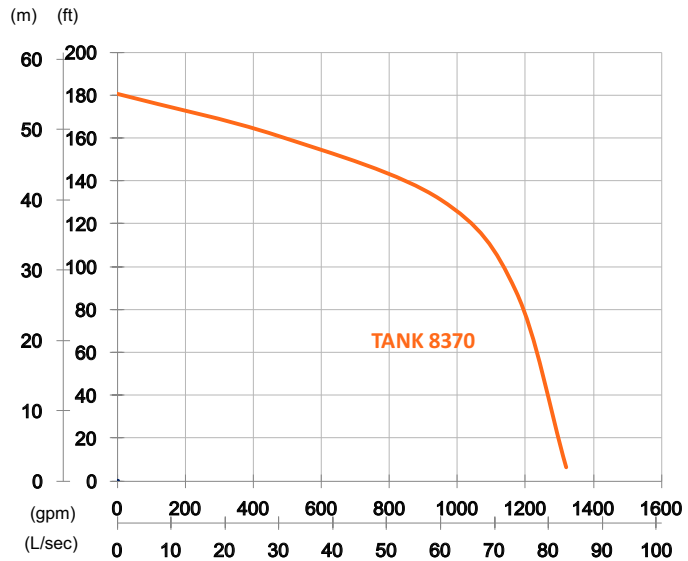

Shaft Speed : 3450 rpm

Outlet : 200mm, 8in

OUTPUT	HEAD	FLOW
37 kW	Rated : 40m, 131ft	Rated : 60 L/s, 951 gpm
50 HP	Max : 55m, 180ft	Max : 83.3 L/s, 1321 gpm

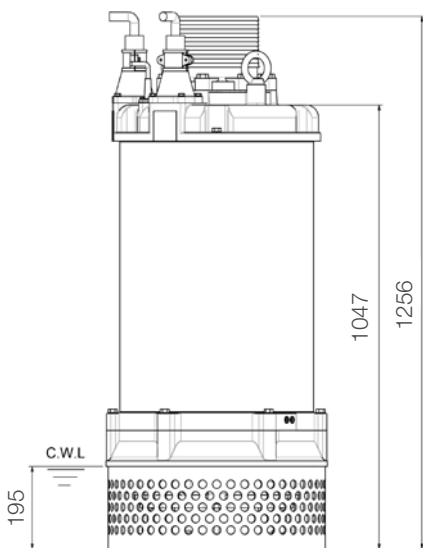

unit : mm

Weight : 510kg / 1124 lbs

Pump Type	Electric Submersible Pumps	
	3-Phase	
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	D.O.L. • Circle Thermal Protector Star-Delta • Miniature Thermal Protector
Starter	D.O.L. • Star-Delta	
Lubricant	Food Grade (ISO VG32)	
Impeller Type	Closed	
Shaft Seal	Double Mechanical Seal	
	Silicon Carbide VS Ceramic / Carbon	
Bearings	C3 Shielded ball bearings	
Cable	PVC (CSA Certified) / H07RN-F	
	10m (33ft) or longer upon request.	
Materials	Pump Casing	Ductile Iron
	Impeller	Chromium Iron
	Motor Frame	Gray Iron
	Motor Shaft	Stainless Steel
	Outer Case	Carbon Steel
Strainer	Carbon Steel	
Max. Liquid Temperature	40°C (104°F)	
Max. Submersion Depth	20m (66ft)	
pH Range	pH 5 - pH 8	