

PRORIL

50Hz


Designed for light weight, excellent performance, low energy consumption, and easy maintenance, PRORIL submersible handy pumps serve a wide range of pumping applications on utility, construction, industrial, and municipal job sites.

Handy and Residue Pump

SAVVY 100/150



Handy Pump



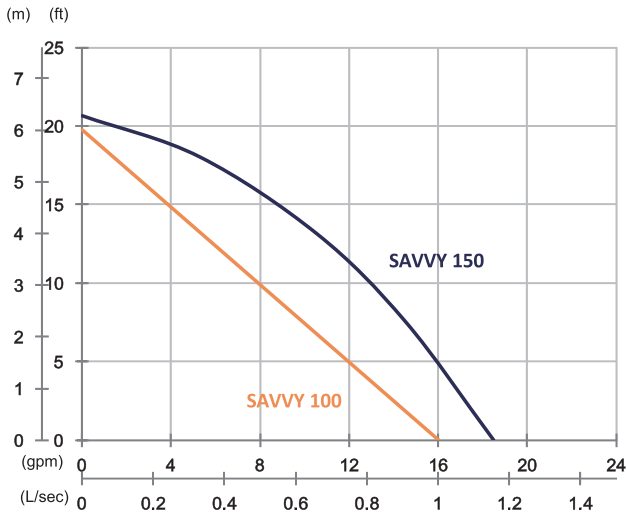

	SAVVY 100	SAVVY 150
OUTPUT	0.1 kW (0.1 3HP)	0.15 kW (0.2 HP)
OUTLET	0.75" (20 mm)	0.75" (20 mm)
SOLID PASSAGE	6 mm	6 mm
Weight	3 kg	3.2 kg
HEAD	Rated: 2 m Max: 6 m	Rated: 4 m Max: 6.3 m
FLOW	Rated: 0.7 L/s Max: 1 L/s	Rated: 0.7 L/s Max: 1.2 L/s

Pump Type	Electric Submersible Pumps	
Motor	Phase	1-Phase
	Type	Induction Motor
	Poles	2 Pole (2850 rpm)
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter	Capacitor-Run
Lubricant	Food Grade (ISO VG115)	
Specs.	Impeller Type	Opened
	Shaft Seal	Oil Seal
	Bearings	Shielded ball bearings
	Cable	H05RN-F 10 m or longer upon request
Materials	Pump Casing	Aluminum
	Impeller	Synthetic Polymers
	Motor Frame	Aluminum
	Motor Shaft	Carbon Steel
Max. Liquid Temperature	40°C (104°F)	
Max. Submersion Depth	5 m (16ft)	
pH Range	pH 5 - pH 8	

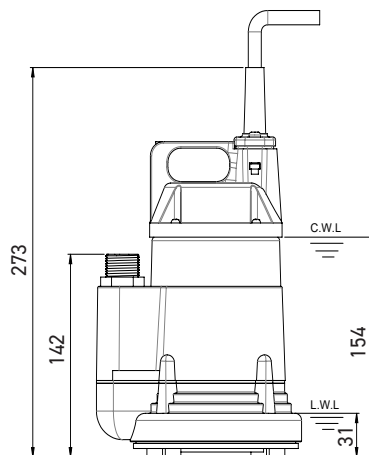

unit : mm
C.W.L : Continuous running water level
L.W.L : Lowest running water level