

# PRORIL


60Hz

Designed for light weight, excellent performance, low energy consumption, and easy maintenance, PRORIL submersible handy pumps serve a wide range of pumping applications on utility, construction, industrial, and municipal job sites.

## Handy and Residue Pump **SAVVY 200**

Handy Pump



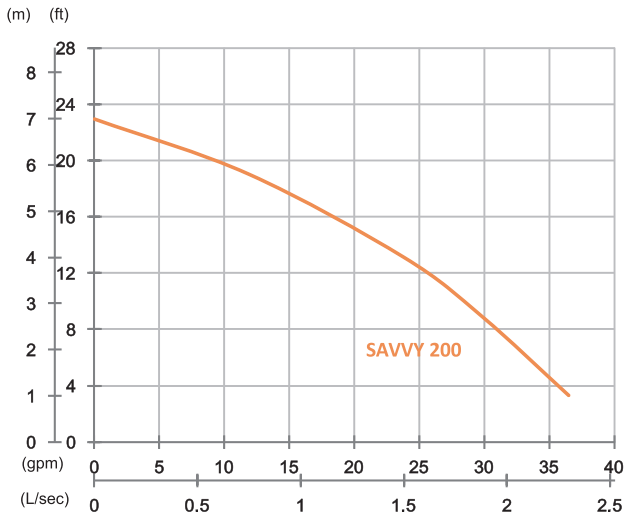

**SAVVY 200**

<b>OUTPUT</b>	0.33 HP (0.25 kW)
<b>OUTLET</b>	0.75" (20 mm)
<b>SOLID PASSAGE</b>	0.2" (6 mm)
<b>Weight</b>	9 lbs/4 kg
<b>HEAD</b>	Rated: 13 ft, 4 m Max: 23 ft, 7 m
<b>FLOW</b>	Rated: 24 gpm, 1.5 L/s Max: 36 gpm, 2.3 L/s

<b>Pump Type</b>		Electric Submersible Pumps
<b>Motor</b>	<b>Phase</b>	1-Phase
	<b>Type</b>	Induction Motor
	<b>Poles</b>	2 Pole (3450 rpm)
	<b>Insulation</b>	Class F
	<b>Protector</b>	Miniature Thermal Protector
	<b>Starter</b>	Capacitor-Run
<b>Lubricant</b>		Food Grade (ISO VG115)
<b>Specs.</b>	<b>Impeller Type</b>	Opened
	<b>Shaft Seal</b>	Oil Seal
	<b>Bearings</b>	Shielded ball bearings
	<b>Cable</b>	CSA-Certified PVC Jacketed Cables 33 ft (10 m) or longer upon request
<b>Materials</b>	<b>Pump Casing</b>	Synthetic Polymers
	<b>Impeller</b>	Synthetic Polymers
	<b>Motor Frame</b>	Stainless Steel
	<b>Motor Shaft</b>	Stainless Steel
<b>Max. Liquid Temperature</b>		40°C (104°F)
<b>Max. Submersion Depth</b>		5 m (16 ft)
<b>pH Range</b>		pH 5 - pH 8

