

PRORIL


60Hz

Designed for light weight, excellent performance, low energy consumption, and easy maintenance, PRORIL submersible handy pumps serve a wide range of pumping applications on utility, construction, industrial, and municipal job sites.

Handy and Residue Pump **SAVVY 300/600**



Handy Pump



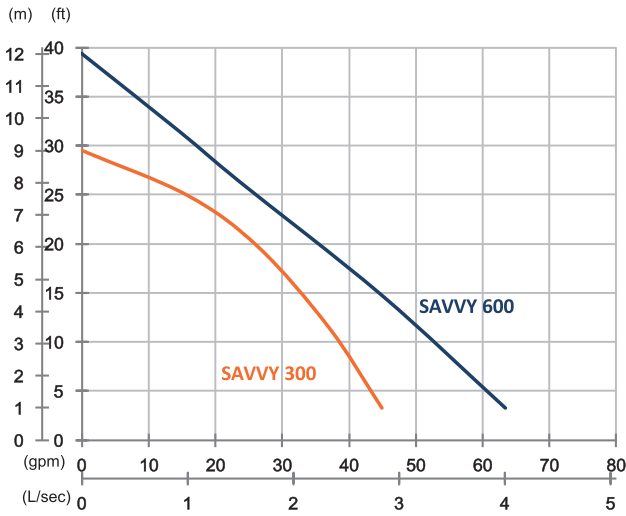

	SAVVY 300	SAVVY 600
OUTPUT	0.33 HP (0.25 kW)	0.75 HP (0.55 kW)
OUTLET	2" (50 mm)	2" (50 mm)
SOLID PASSAGE	0.2" (6 mm)	0.2" (6 mm)
Weight	9 lbs/4 kg	13 lbs/6 kg
HEAD	Rated: 20 ft, 6 m Max: 30 ft, 9 m	Rated: 26 ft, 8 m Max: 36 ft, 12 m
FLOW	Rated: 26 gpm, 1.7 L/s Max: 45 gpm, 2.8 L/s	Rated: 24 gpm, 1.5 L/s Max: 63 gpm, 4 L/s

Pump Type		Electric Submersible Pumps
Motor	Phase	1-Phase
	Type	Induction Motor
	Poles	2 Pole (3450 rpm)
	Insulation	Class F
	Protector	Miniature Thermal Protector
Starter		Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Specs.	Impeller Type	Vortex
	Shaft Seal	Single Mechanical Seal
		Ceramic/Carbon
	Bearings	C3 Shielded ball bearings
	Cable	CSA-Certified PVC Jacketed Cables
33 ft (10 m) or longer upon request		
Materials	Pump Casing	Synthetic Polymers
	Impeller	Synthetic Polymers
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Strainer	Synthetic Polymers
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		10 m (33 ft)
pH Range		pH 5 - pH 8

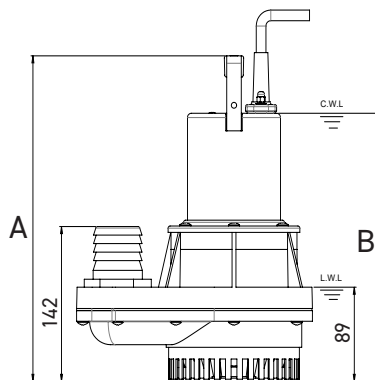

	A	B
SAVVY 300	306	252
SAVVY 600	341	287

unit : mm
C.W.L : Continuous running water level
L.W.L : Lowest running water level