

PRORIL

50Hz


Designed for light weight, excellent performance, low energy consumption, and easy maintenance, PRORIL residue pumps can pump down to a low water level at 1/16" (2mm), which is ideal for pumping flat surface such as basements, parking garages, pools, spas and etc.

Handy and Residue Pump

SAVVY BASE 300/600



Residue Pump



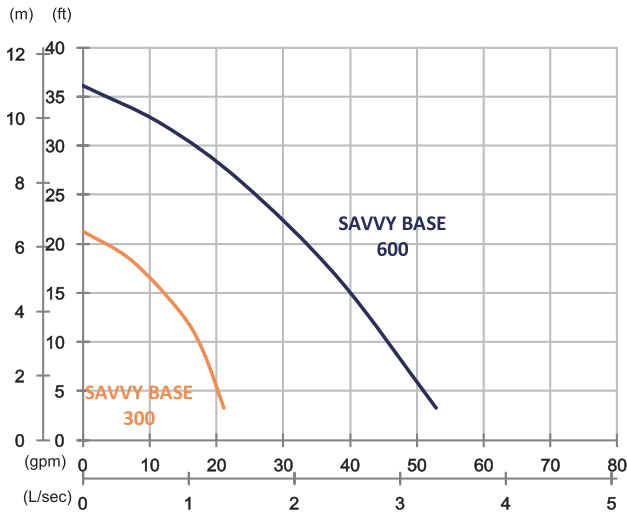

	SAVVY BASE 300	SAVVY BASE 600
OUTPUT	0.25 kW (0.33 HP)	0.55 kW (0.75 HP)
OUTLET	1" (25 mm)	2" (50 mm)
SOLID PASSAGE	2 mm	5 mm
Weight	4 kg	6 kg
HEAD	Rated: 4 m Max: 6.5 m	Rated: 8 m Max: 11 m
FLOW	Rated: 0.9 L/s Max: 1.3 L/s	Rated: 1.5 L/s Max: 3.3 L/s

Pump Type		Electric Submersible Pumps
Motor	Phase	1-Phase
	Type	Induction Motor
	Poles	2 Pole (2850 rpm)
	Insulation	Class F
	Protector	Miniature Thermal Protector
Starter		Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Specs.	Impeller Type	Vortex
	Shaft Seal	Single Mechanical Seal
		Ceramic/Carbon
	Bearings	C3 Shielded ball bearings
	Cable	H05RN-F
10 m or longer upon request		
Materials	Pump Casing	Synthetic Polymers
	Impeller	Synthetic Polymers
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
Bottom Plate	Synthetic Polymers	
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		10 m (33 ft)
pH Range		pH 5 - pH 8

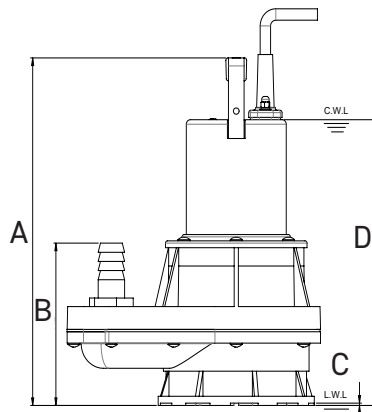

unit : mm

C.W.L : Continuous running water level
L.W.L : Lowest running water level

	A	B	C	D
SAVVY BASE 300	304	142	2	250
SAVVY BASE 600	357	162	5	303