

PRORIL

60Hz


Designed for light weight, excellent performance, low energy consumption, and easy maintenance, PRORIL residue pumps can pump down to a low water level at 1/16" (2mm), which is ideal for pumping flat surface such as basements, parking garages, pools, spas and etc.

Handy and Residue Pump

SAVVY BASE 300/600



Residue Pump



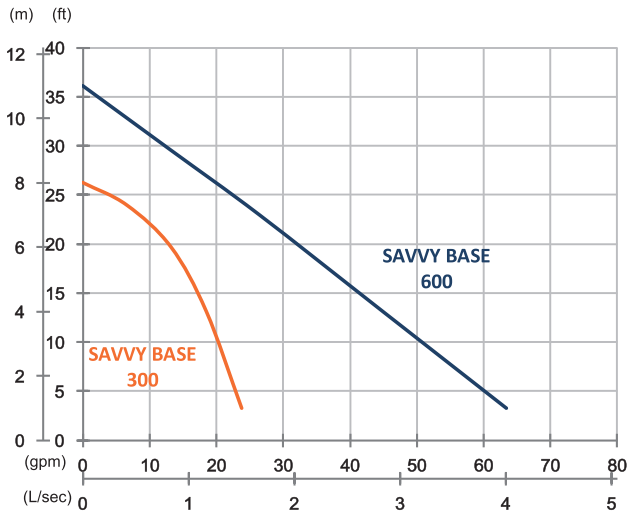

| | SAVVY BASE 300 | SAVVY BASE 600 |
|----------------------|--|--|
| OUTPUT | 0.33 HP (0.25 kW) | 0.75 HP (0.55 kW) |
| OUTLET | 1" (25 mm) | 2" (50 mm) |
| SOLID PASSAGE | 0.1" (2 mm) | 0.2" (5 mm) |
| Weight | 9 lbs/4 kg | 13 lbs/6 kg |
| HEAD | Rated: 20 ft, 6 m Max: 26 ft, 8 m | Rated: 23 ft, 7 m Max: 36 ft, 11 m |
| FLOW | Rated: 13 gpm, 0.8 L/s Max: 24 gpm, 1.5 L/s | Rated: 26 gpm, 1.7 L/s Max: 63 gpm, 4 L/s |

| | | |
|--------------------------------|----------------------------|--|
| Pump Type | Electric Submersible Pumps | |
| Motor | Phase | 1-Phase |
| | Type | Induction Motor |
| | Poles | 2 Pole (3450 rpm) |
| | Insulation | Class F |
| | Protector | Miniature Thermal Protector |
| | Starter | Capacitor-Run |
| Lubricant | Food Grade (ISO VG115) | |
| Specs. | Impeller Type | Vortex |
| | Shaft Seal | Single Mechanical Seal Ceramic/Carbon |
| | Bearings | C3 Shielded ball bearings |
| | Cable | CSA-Certified PVC Jacketed Cables 33 ft (10 m) or longer upon request |
| | Materials | Pump Casing |
| | Impeller | Synthetic Polymers |
| | Motor Frame | Stainless Steel |
| | Motor Shaft | Stainless Steel |
| | Bottom Plate | Synthetic Polymers |
| Max. Liquid Temperature | | 40°C (104°F) |
| Max. Submersion Depth | | 10 m (33 ft) |
| pH Range | | pH 5 - pH 8 |

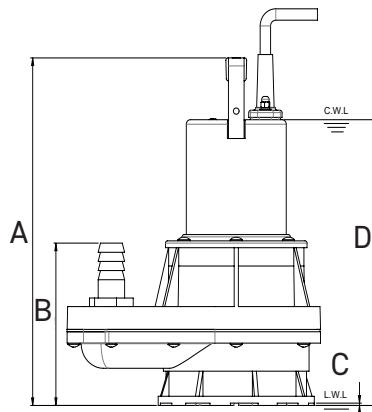

| | A | B | C | D |
|----------------|-----|-----|---|-----|
| SAVVY BASE 300 | 304 | 142 | 2 | 250 |
| SAVVY BASE 600 | 357 | 162 | 5 | 303 |

unit : mm

C.W.L. : Continuous running water level
L.W.L. : Lowest running water level