

PRORIL

60Hz


Designed for light weight, excellent performance, low energy consumption, and easy maintenance, PRORIL residue pumps can pump down to a low water level at 1/16" (2mm), which is ideal for pumping flat surface such as basements, parking garages, pools, spas and etc.

Handy and Residue Pump

SMART LITE BASE 400

Residue Pump



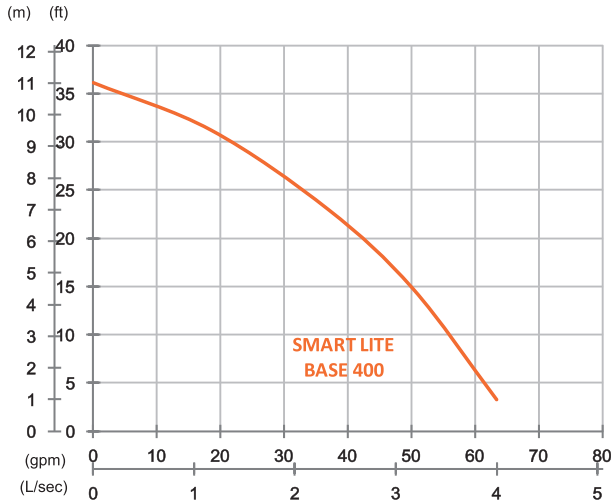

SMART LITE BASE 400

OUTPUT	0.5 HP (0.4 kW)
OUTLET	2" (50 mm)
SOLID PASSAGE	0.1" (2 mm)
Weight	24 lbs/11 kg
HEAD	Rated: 23 ft, 7 m Max: 36 ft, 11 m
FLOW	Rated: 37 gpm, 2.3 L/s Max: 63 gpm, 4 L/s

Pump Type		Electric Submersible Pumps
Motor	Phase	1-Phase, 3-Phase
	Type	Induction Motor
	Poles	2 Pole (3450 rpm)
	Insulation	Class F
	Protector	Miniature Thermal Protector Circle Thermal Protector
	Starter	1-Phase • Capacitor-Run, 3-Phase • D.O.L
Lubricant		Food Grade (ISO VG32)
Specs.	Impeller Type	Semi-Vortex
	Shaft Seal	Double Mechanical Seal
		Silicon Carbide VS Ceramic/Carbon
	Bearings	C3 Shielded ball bearings
	Cable	CSA-Certified PVC Jacketed Cables
33 ft (10 m) or longer upon request		
Materials	Pump Casing	Gray Iron
	Impeller	Synthetic Polymers
	Motor Frame	Aluminum
	Motor Shaft	Stainless Steel
	Outer Case	Aluminum
	Bottom Plate	Synthetic Rubber
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		20 m (66 ft)
pH Range		pH 5 - pH 8

