

PRORIL

50Hz


Designed for continuous operations, excellent performance and easy maintenance, PRORIL Tank series pumps have proven their reliability and durability in demanding areas like construction, mining, tunneling, quarries, industries and rental applications.

Dewatering Pump

TANK SLIM 230/330



High Chrome Dewatering Pump



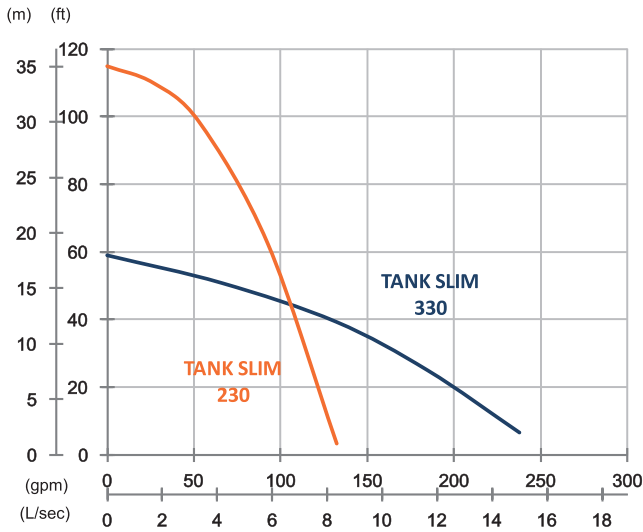

	TANK SLIM 230	TANK SLIM 330
OUTPUT	3 kW (4 HP)	3 kW (4 HP)
OUTLET	2" (50 mm)	3" (80 mm)
SOLID PASSAGE	7 mm	7 mm
Weight	45 kg	38 kg
HEAD	Rated: 30 m Max: 35 m	Rated: 12 m Max: 18 m
FLOW	Rated: 3.3 L/s Max: 8.3 L/s	Rated: 8.3 L/s Max: 15 L/s

Pump Type	Electric Submersible Pumps	
Motor	Phase	3-Phase
	Type	Induction Motor
	Poles	2 Pole (2850 rpm)
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter	D.O.L.
Lubricant	Food Grade (ISO VG32)	
Specs.	Impeller Type	Closed - Dual impellers (230)
	Shaft Seal	Double Mechanical Seal
		Silicon Carbide VS Ceramic Carbon
	Bearings	C3 Shielded ball bearings
Cable	H07BQ-F	
	10 m or longer upon request	
Materials	Pump Casing	Gray Iron
	Impeller	Chromium Iron
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Outer Case	Stainless Steel
	Strainer	Stainless Steel
Max. Liquid Temperature	40°C (104°F)	
Max. Submersion Depth	20 m (66 ft)	
pH Range	pH 5 - pH 8	

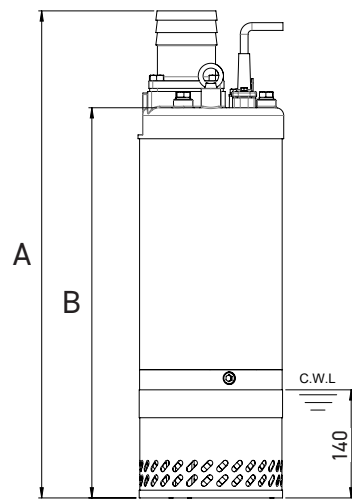

	A	B
TANK SLIM 230	659	544
TANK SLIM 330	629	514

unit : mm
C.W.L : Continuous running water level