

PRORIL

50Hz


Designed for continuous operations, excellent performance and easy maintenance, PRORIL Tank series pumps have proven their reliability and durability in demanding areas like construction, mining, tunneling, quarries, industries and rental applications.

Dewatering Pump

TANK SLIM 380


High Chrome Dewatering Pump



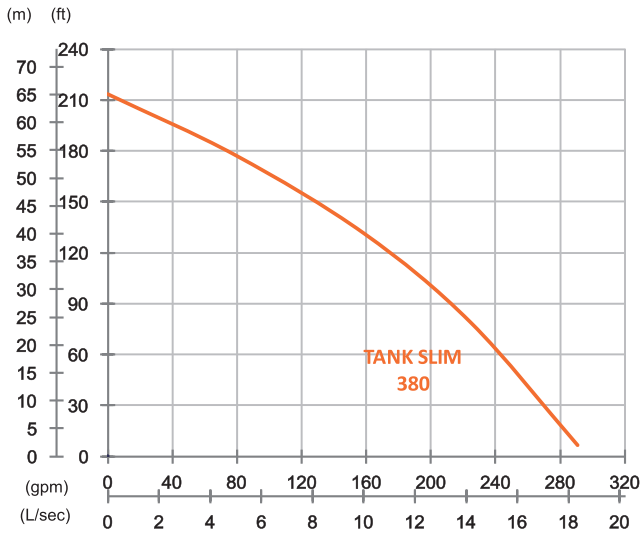

TANK SLIM 380

| | |
|---------------|--------------------------------|
| OUTPUT | 8 kW (11 HP) |
| OUTLET | 3" (80 mm) |
| SOLID PASSAGE | 8 mm |
| Weight | 92 kg |
| HEAD | Rated: 40 m Max: 65 m |
| FLOW | Rated: 10 L/s Max: 18.3 L/s |

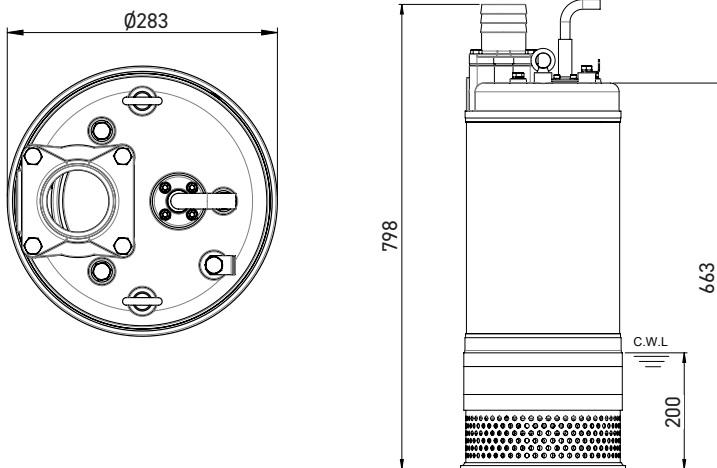

unit : mm
C.W.L : Continuous running water level

| | | |
|-----------------------------|----------------------------|------------------------------------|
| Pump Type | Electric Submersible Pumps | |
| Motor | Phase | 3-Phase |
| | Type | Induction Motor |
| | Poles | 2 Pole (2850 rpm) |
| | Insulation | Class F |
| | Protector | Circle Thermal Protector |
| | Starter | D.O.L. |
| Lubricant | Food Grade (ISO VG32) | |
| Specs. | Impeller Type | Opened · Dual impellers |
| | Shaft Seal | Double Mechanical Seal |
| | | Silicon Carbide VS Ceramic/\Carbon |
| | Bearings | C3 Shielded ball bearings |
| | Cable | H07BQ-F |
| 10 m or longer upon request | | |
| Materials | Pump Casing | Gray Iron |
| | Impeller | Chromium Iron |
| | Motor Frame | Stainless Steel |
| | Motor Shaft | Stainless Steel |
| | Strainer | Stainless Steel |
| Max. Liquid Temperature | 40°C (104°F) | |
| Max. Submersion Depth | 20 m (66 ft) | |
| pH Range | pH 5 - pH 8 | |