



60Hz


Designed for continuous operations, excellent performance and easy maintenance, PRORIL Tank series pumps have proven their reliability and durability in demanding areas like construction, mining, tunneling, quarries, industries and rental applications.

Dewatering Pump

# TANK SLIM 380

High Chrome Dewatering Pump




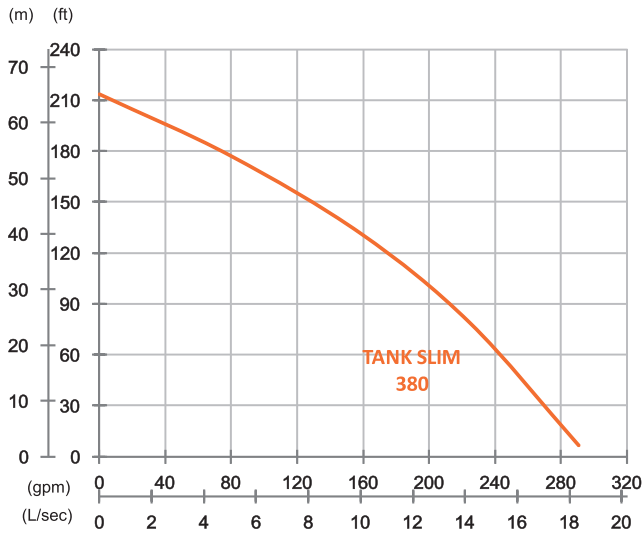

**TANK SLIM 380**

<b>OUTPUT</b>	11 HP (8 kW)
<b>OUTLET</b>	3" (80 mm)
<b>SOLID PASSAGE</b>	0.3" (8 mm)
<b>Weight</b>	203 lbs/92 kg
<b>HEAD</b>	Rated: 131 ft, 40 m Max: 213 ft, 65 m
<b>FLOW</b>	Rated: 159 gpm, 10 L/s Max: 291 gpm, 18.3 L/s

<b>Pump Type</b>	Electric Submersible Pumps	
<b>Motor</b>	<b>Phase</b>	3-Phase
	<b>Type</b>	Induction Motor
	<b>Poles</b>	2 Pole (3450 rpm)
	<b>Insulation</b>	Class F
	<b>Protector</b>	Circle Thermal Protector
	<b>Starter</b>	D.O.L.
<b>Lubricant</b>	Food Grade (ISO VG32)	
<b>Specs.</b>	<b>Impeller Type</b>	Opened · Dual impellers
	<b>Shaft Seal</b>	Double Mechanical Seal
		Silicon Carbide VS Ceramic/Carbon
	<b>Bearings</b>	C3 Shielded ball bearings
<b>Cable</b>	CSA-Certified PVC Jacketed Cables	
	33 ft (10 m) or longer upon request	
<b>Materials</b>	<b>Pump Casing</b>	Gray Iron
	<b>Impeller</b>	Chromium Iron
	<b>Motor Frame</b>	Stainless Steel
	<b>Motor Shaft</b>	Stainless Steel
	<b>Strainer</b>	Stainless Steel
<b>Max. Liquid Temperature</b>	40°C (104°F)	
<b>Max. Submersion Depth</b>	20 m (66 ft)	
<b>pH Range</b>	pH 5 - pH 8	

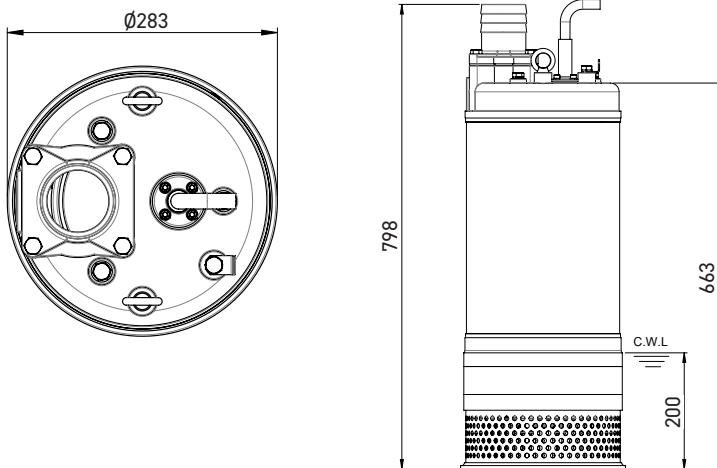

unit : mm  
C.W.L : Continuous running water level